



e size Premium Pack



Flush fitting maturing cabinet, for wine ageing

Technical Specifications

Equipment	Capacity	110 bottles maximum*		
Standard shelf Y	Temperature	 Default setup temperature: 12°C/54°F Electronic regulation from 5 to 20°C / 41 to 68°F 		
Sliding shelf ACMSCV2 8 bottles	Design	 3 doors options: technical solid door, full glass door with full glass handle (removable) or glass door black frame with stainless steel black handle Reversible doors (only on glass and full glass doors) Lock 	 LED screen with touch buttons Inner lighting (3 lighting options: permanent, open door, disabled) Amber screen display 	
Equipment Y Optional shelves	Accessories	 13 sliding shelf equiped with «Mains du Sommelier» and 3 storage shelves 	 1 EuroCave key ring 	
Storage shelf AXLNH 50 bottles AXLNH AOPRES 9 bottles	Equipment	 Charcoal filter (with counter) Humidity cassette Low emission glasses and argon gas between 2 panes (only on glass and full glass doors) 	 4 adjustable feet Condensate drip tray at the back 	
	Regulation	 Electronic regulation Display of the real temperature inside the cabinet Hygrometry display 	 Visual alarms in case of dysfunction (open door, sensor fault, temperature alarm, charcoal filter, threshold humidity) Automatic defrost 	
	Technologies	Cold production: Cords: Hot production: Hot release: Inner material:	Static cooling and air fan CE/UK/AU/CH/ US/JA/C6/CN Heating element Automatic Threshold : adjustable Aluminium	

Exterior coating material:

Insulation type:

HDF (High Density Fiber)

PU foam

*Traditional Bordeaux format

General features

	Full Glass door / Glass door	Technical solid door
Empty wine cabinet net weight (kg)	79	66
Equipped cabinet net weight (kg)	85	72
Gross weight packaged (kg)	101	88
Dimensions H x W x D (mm)	1778/1794 x 594 x 595**	1796/1812 x 594 x 590**
Dimensions packaged (mm)	1950 x 720 x 760	1950 x 720 x 760
Colour	Nero - RAL 9005	Nero - RAL 9005

**With the rear stop, without the handle


Energy efficiency & Consumption

Cords	230V-50Hz (R600a)		115V-60Hz (R600a)	
Type of door	Full Glass door / Glass door	Technical solid door	Full Glass door / Glass door	Technical solid door
Energy efficiency class	G	G	/	/
Annual energy consumption AEC (Kwh/year)	183	150	212	212
Sound emission (dB(A))	41	41	41	41
Sound emission Class	С	С	С	С
Ambient operating temperature (°C/°F)	0-35/ 32-95	0-30/ 32-86	0-35/ 32-95	0-30/ 32-86
Useful volume (litres)	319			

Compact, in a few words...

Wine that's ready to drink whenever you want it!

In flush-fitted version, wine cabinets in the Compact collection fit perfectly into your kitchen as their dimensions are determined by kitchen designers. In free-standing version, they meet your space constraints and easily fit into your living room or cellar.

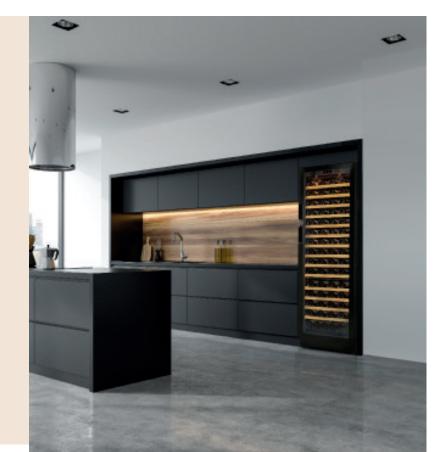







Manufactured in France 1 temperature cabinet Large size

Access Pack



Flush fitting maturing cabinet, for wine ageing

Technical Specifications

Equipment	Capacity	164 bottles maximum*	
Standard shelves	Temperature	Default setup temperature: 12°C/54 Electronic regulation from 5 to 20°C	
Sliding shelf ACMSCV2 8 bottles Storage shelf AXLNH 50 bottles	Design	 3 doors options: technical solid doo, full glass door with full glass handle (removable) or glass door black frame with stainless steel black handle Reversible doors (only on glass and full glass doors) Lock 	 LED screen with touch buttons Inner lighting (3 lighting options: permanent, open door, disabled) Amber screen display
Equipment Y Optional shelf	Accessories	 1 sliding shelves equiped with «Mains du Sommelier» and 3 storing shelves 	•1 EuroCave key ring
Charles and Charle	Equipment	 Charcoal filter (with counter) Humidity cassette Low emission glasses and argon gas between 2 panes (only on glass and full glass doors) 	•4 adjustable feet •Condensate drip tray at the back
Presentation kit AOPRES 9 bottles	Regulation	 Electronic regulation Display of the real temperature inside the cabinet Hygrometry display 	 Visual alarms in case of dysfunction (open door, sensor fault, temperature alarm, charcoal filter, threshold humidity) Automatic defrost
	Technologies	Cold production: Cords: Hot production: Hot release: Inner material:	Static cooling and air fan CE/UK/AU/CH/ US/JA/C6/CN Heating element Automatic Threshold : adjustable Aluminium

*Traditional Bordeaux format

Exterior coating material:

Insulation type:

HDF (High Density Fiber)

PU foam

General features

	Full Glass door / Glass door	Technical solid door
Empty wine cabinet net weight (kg)	79	66
Equipped cabinet net weight (kg)	85	72
Gross weight packaged (kg)	101	88
Dimensions H x W x D (mm)	1778/1794 x 594 x 595**	1796/1812 x 594 x 590**
Dimensions packaged (mm)	1950 x 720 x 760	1950 x 720 x 760
Colour	Nero - RAL 9005	Nero - RAL 9005

**With the rear stop, without the handle


Energy efficiency & Consumption

Cords	230V-50Hz (R600a)		115V-60Hz (R600a)	
Type of door	Full Glass door / Glass door	Technical solid door	Full Glass door / Glass door	Technical solid door
Energy efficiency class	G	G	/	/
Annual energy consumption AEC (Kwh/year)	183	150	212	212
Sound emission (dB(A))	41	41	41	41
Sound emission Class	С	С	С	С
Ambient operating temperature (°C/°F)	0-35/ 32-95	0-30/ 32-86	0-35/ 32-95	0-30/ 32-86
Useful volume (litres)	319			

Compact, in a few words...

Wine that's ready to drink whenever you want it!

In flush-fitted version, wine cabinets in the Compact collection fit perfectly into your kitchen as their dimensions are determined by kitchen designers. In free-standing version, they meet your space constraints and easily fit into your living room or cellar.

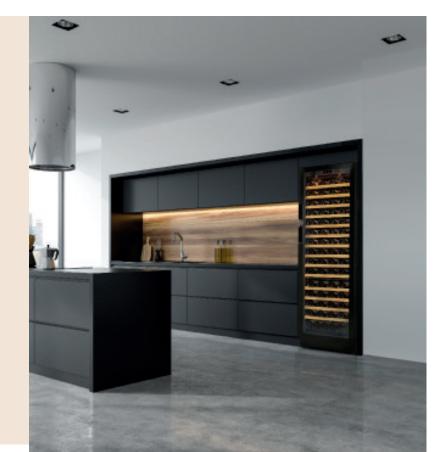

8